




**STEEL ROOFING  
SUPPLY CENTRE**

*innovative roofing specialists*

# Half-Round Gutters

PRODUCT INFORMATION

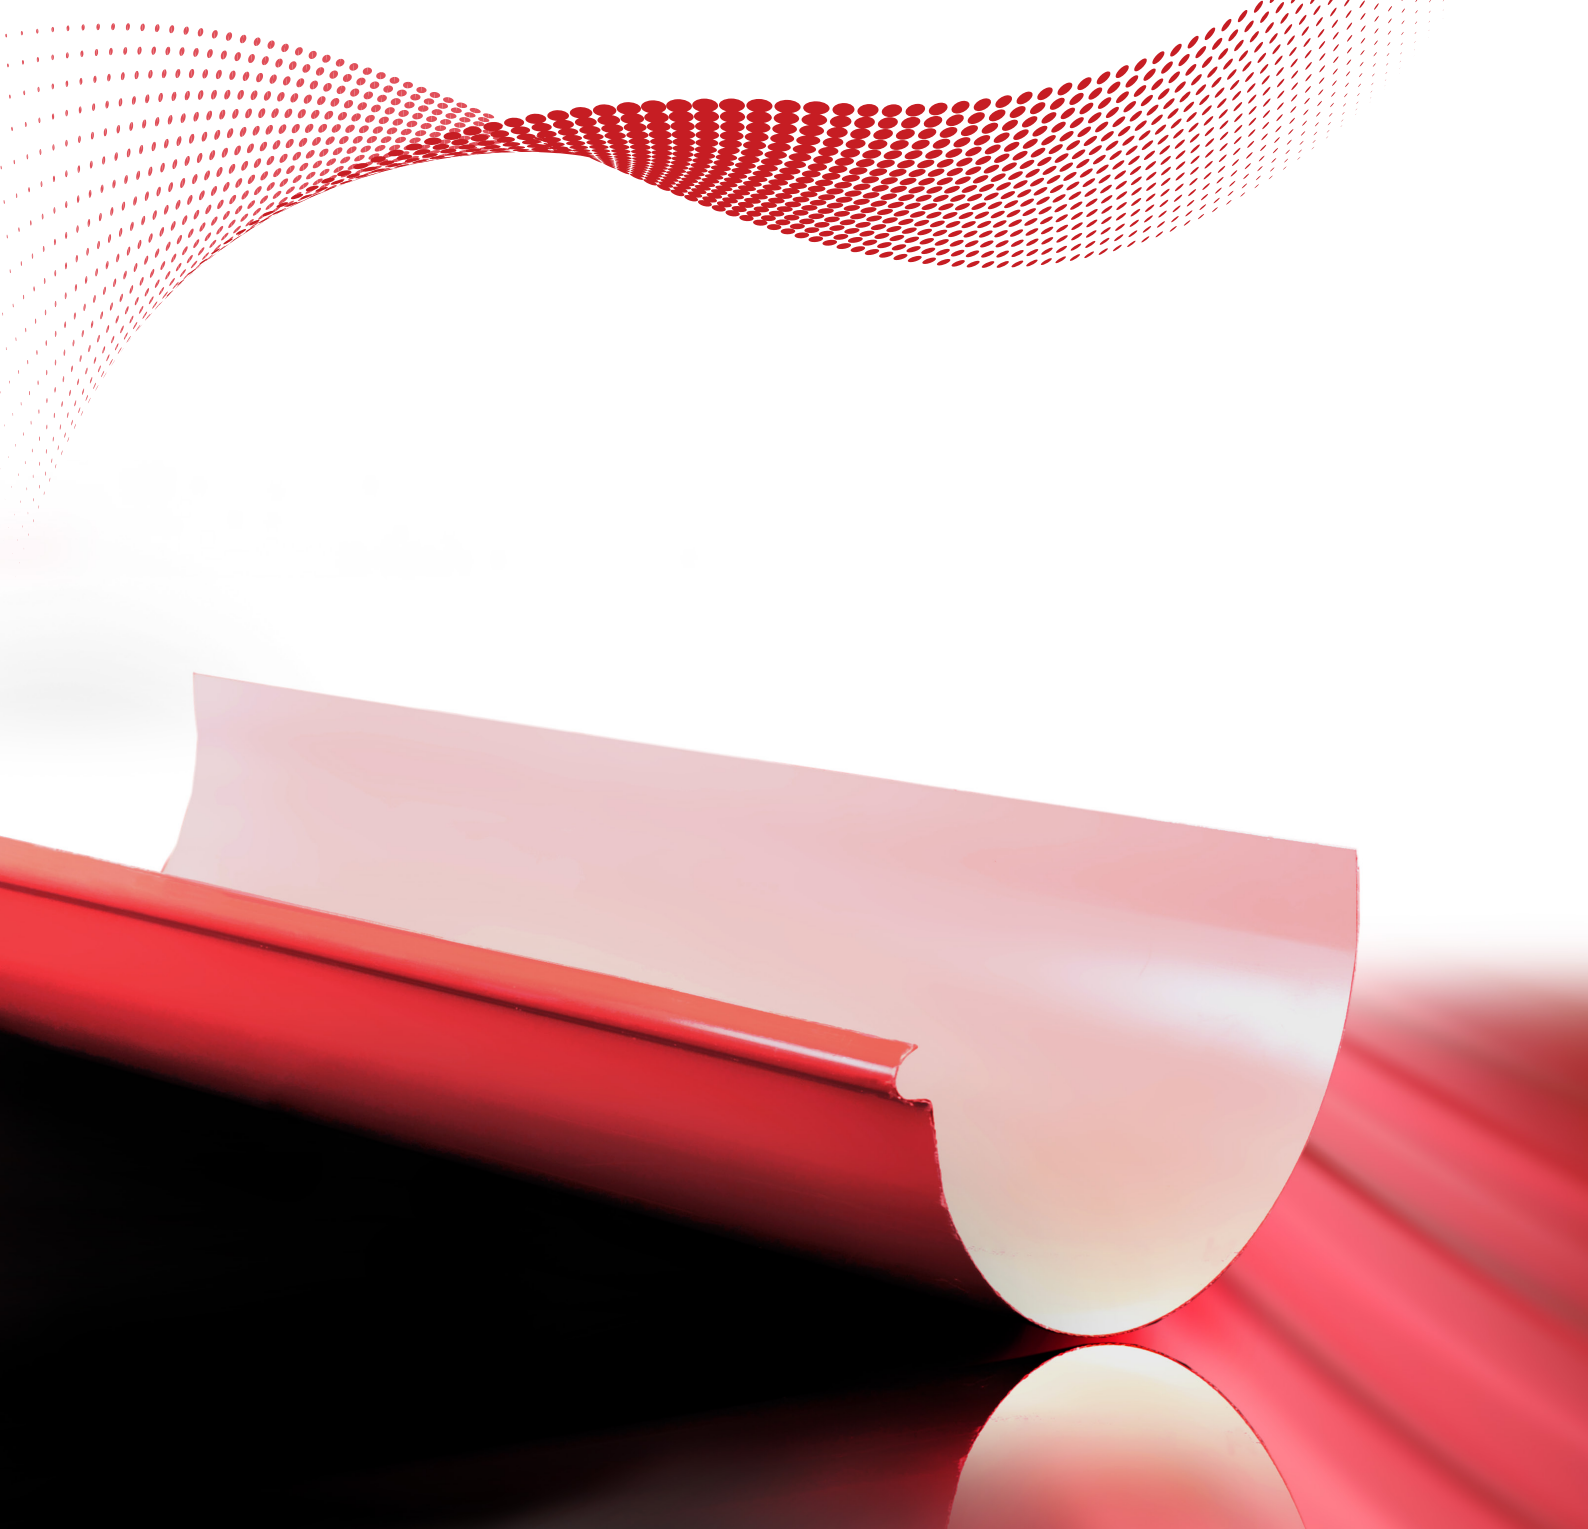

Half round gutters have major role in architecture. With no corners for debris build up, they remain cleaner longer and require less maintenance than square eaves gutters, while maintaining consistent appearance, strength and performance. But the present range of standard half round gutters available in New South Wales is very limited.

With its background of over 30 years as a manufacturer of specialised roofing accessories and rainwater goods, SRSC Pty Ltd has recently completed several major half-round gutter systems:

- Army Warehouses, Moorebank
- Blacktown Railway Station
- HMAS Waterhen
- Several Schools, Ambulance stations and Fire Stations.

SRSC's Half Round Gutters, gutter brackets and downpipes to suit, are available in the below materials, in various gauge thicknesses and in standard or custom sizes and colours:



- Galvanised Steel
- Zinalume Steel
- Colorbond Ultra
- Colorbond Metallic
- Stainless Steel
- Aluminium
- Copper
- Zinc

Maximum length for gutters and downpipes is 6 metres. With a maximum gutter width of 600mm.

Standard and custom leaf guard solutions including those to comply with bushfire zone requirements, for all gutter and downpipe sizes, are available from SRSC.

Normally, these gutters are supported with:

- A1 Brackets are suitable for light industrial or residential applications up to 200mm half round gutter sizes
- A2 Brackets are 3mm thick and are suitable for medium industrial applications
- A4 Brackets are laser cut, can be custom made to suit individual project requirements and designs in the full range of materials and colours to support and compliment any size half round gutter.

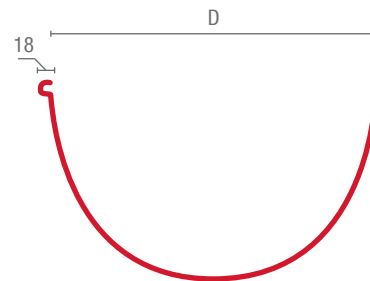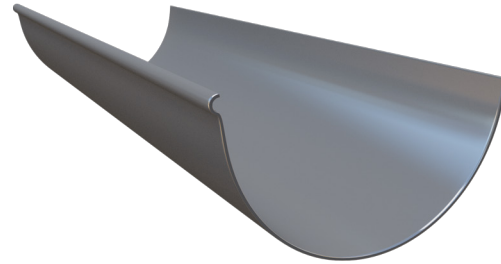

#### Half Round Gutter Profile

Standard sizes with bead available in COLORBOND, Zinalume, Galvanised, Copper, Zinc and Stainless Steel

Diameter	D (mm)	AREA in mm	Litres per metre
150mm	153	9,200	9.2
200mm	192	14,500	14.5
250mm	250	24,500	24.5
300mm	300	35,300	35.3
350mm	350	48,100	48.1
400mm	400	62,800	62.8




A1 BRACKET




A2 BRACKET




A4 BRACKET  
PITCH-STANDOFF



A4 BRACKET  
STANDARD



NOZZLE



RAINWATERHEAD  
NOZZLE